
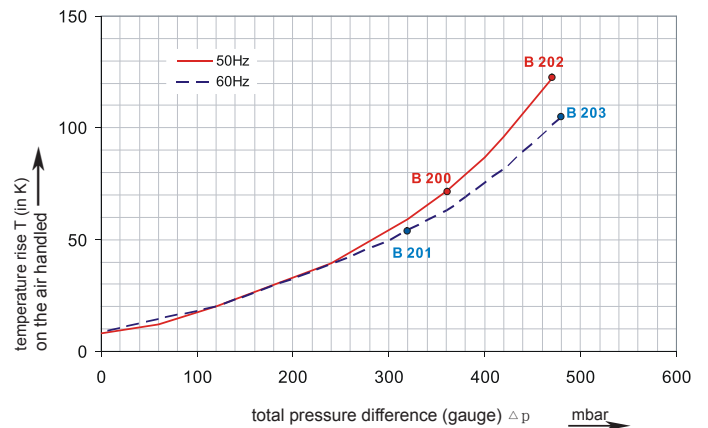
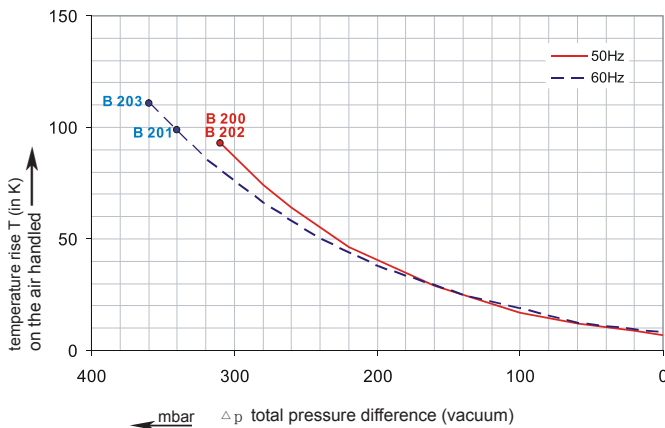
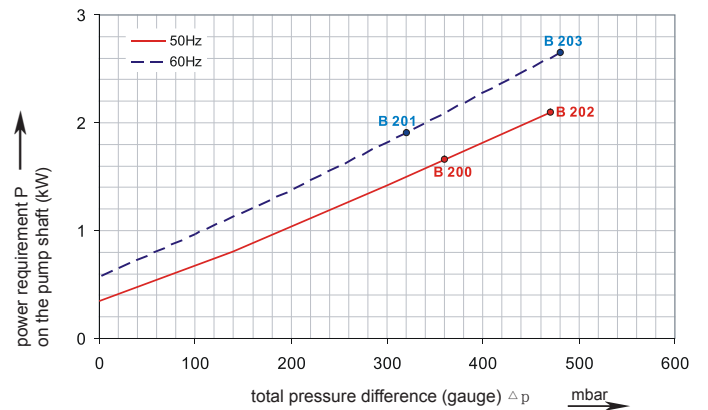
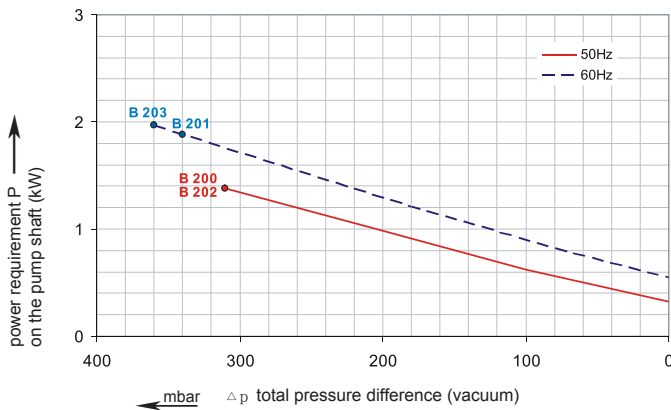
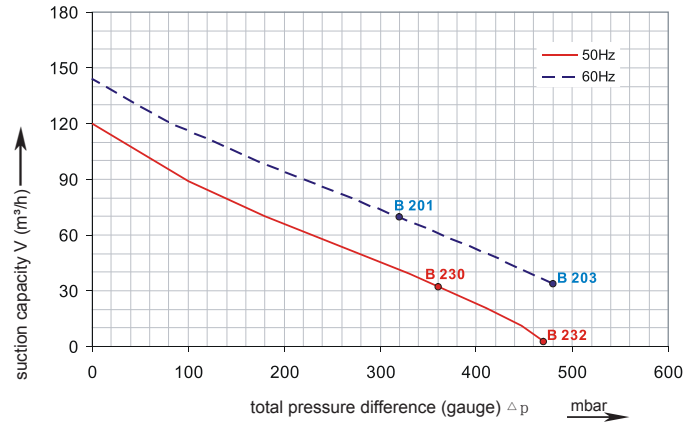


Data sheet 4HB 510

4HB


Performance curve for Vacuum pump

Performance curve for Compressor

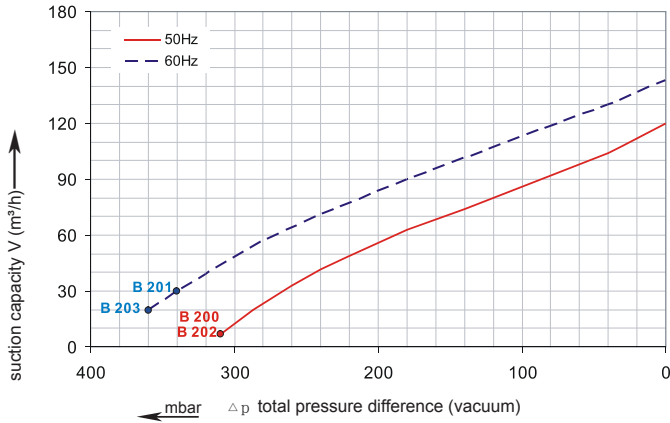

The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of +/- 10 %. The total pressure differences are valid for suction and ambient temperatures up to 25 °C. For other conditions please confer with us.

Each 4HB type can be applied both as vacuum pump and compressor in continuous operation over the total stated performance curve range. The motors are available as standard for the input voltage range of 50 and 60 Hz and for protection category IP 55 as well as approved for UL and CSA.

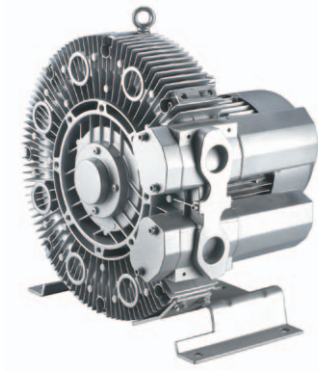

Data sheet 4HB 510




Selection and ordering data

Type 4HB 510

Curve No.	Order No.	Fre- quency	Rated power	Input voltage	Input current	Permissible total differential pressure ²⁾		Sound pressure level ³⁾	Weight ca.
						Vacuum mbar	Compressor mbar		
		Hz	kW	V	A			dB(A)	kg

3~ 50/60 Hz IP55 insulation material class F 1)

B 200	4HB 510-150T	50	1.5	200D ... 240D	345Y...415Y	7.5D	4.3Y	-310	360	64	26
B 201	4HB 510-150T	60	1.75	220D ... 275D	380Y...480Y	7.6D	4.4Y	-340	320	68	26
B 202	4HB 510-220T	50	2.2	200D ... 240D	345Y...415Y	11.4D	6.6Y	-310	470	64	29
B 203	4HB 510-220T	60	2.55	220D ... 275D	380Y...480Y	11.4D	6.5Y	-360	480	68	29

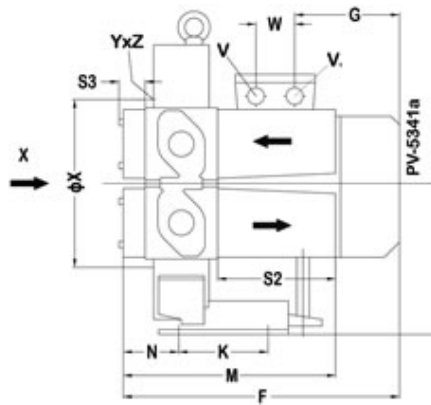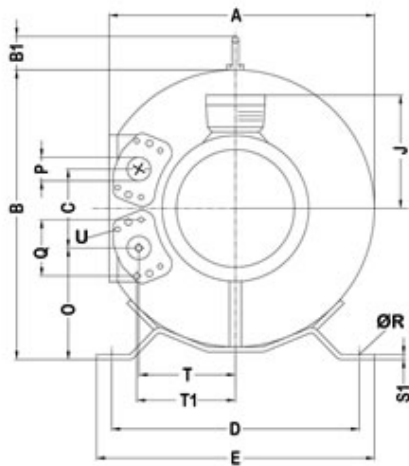

A	B	C	D	E	F				
368	395	114	328	363	361				
G	H	J	K	M	N	O			
185	205	128	152	265	68	148			
P	Q	ØR	S1	S2	S3	T	T1		
G 1 ¼	64	14	5	140	31	137	138		
U	V	V1	W	ØX	Y_Z				
M6×17	M25×1.5	M16×1.5	32	192	M8×15				

All G-4RB achieve the standards and norms of the low voltage directive (LVD)2006/95/EC, rotating electrotechnical motor EN 60034-1-2004, electromagnetic compatibility(EMC)EN55014-1/2,EN61000-2/-3/-4/-6.

- 1) For standard UL for ELECTRIC MOTOR UL 1004-1.
- 2) Relief-valve are available for limiting differential pressure.
- 3) Measuring-surface sound-pressure level acc. to DIN EN 21680, measured at a distance of 1 m. The pump is throttled to an average suction pressure, a hose is connected to the discharge side (compressor) / suction side (vacuum pump), but is not fitted with relief valves.

The motors are designed according to the DIN EN 60 034 / DIN IEC 34-1 and temperature class F.

For the three phase machines the tolerances are +/- 10 % for fixed voltage and +/- 5 % for voltage range.

The single phase machines are designed with a +/- 5 % tolerances. If only 90 % of the maximum allowed pressure will be used for the continuous operating then the allowed voltage range add to +/- 10 %.

For all single and three phase machines which designed according to the UL and CSA norm (UL 1004-1) the maximum allowed voltage tolerances are - 10 % resp. + 6 %.

The frequency tolerance is maximum +/- 2 %.